


FML-R10-MCT

Customer Name: _____

Project Name: _____

Note: _____ | Type: _____

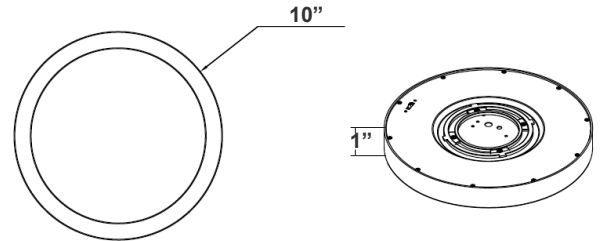

10" x 1"

Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

Features

- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Wet Location Performance
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Die-cast Aluminum. Powder-Coated
- 5-Year Warranty
- 1" Deep

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 17W
- Efficacy: 60 LPW

Mechanical:

- White Finish
- Die-cast Aluminum. Powder-Coated
- Maximum Ambient Temperature: 104°F
- Rated life: 50,000 hrs

Lighting:

- Lens: White translucent acrylic lens
- LED: Edge Lit LED Technology
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1020LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 90

Applications:



- Flush Mount lighting can use in most rooms of the house, especially those where you want ambient, general light. It's especially useful for hallways, kitchens, family rooms, bathrooms, closets, and bedrooms. Also Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:


• 11W | 660LM | FML-R6-MCT • 14W | 840LM | FML-R8-MCT • 26W | 1560LM | FML-R14-MCT • 30W | 2100LM | FML-R18-MCT • 45W | 2700LM | FML-R22-MCT



Photometrics: FML-R10-MCT



BUG Rating: B1-U1-G0

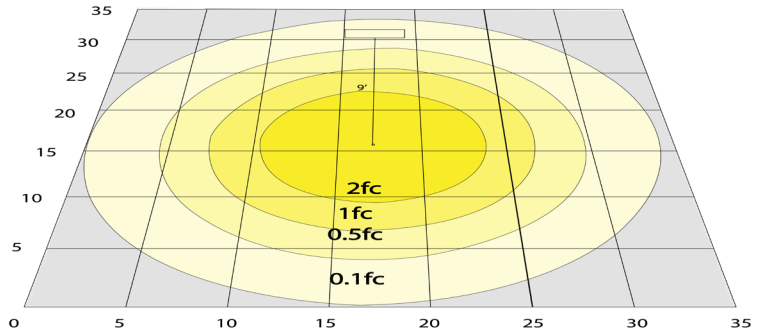


Simulation Based on 4000K Area 35' x 35' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FML-R10-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FML-R10-MCT	17W	120V	1020LM	3000K/ 4000K/ 5000K	B1-U1-G0	60

Sample Ordering

Model	Size	Color Temp.
FML	R10	MCT

Accessory:

Blank = No Option For Accessories

FML-R10-TRM-BK = 10" ROUND TRIM FOR FML-R10 SERIES, BLACK FINISH

FML-R10-TRM-BN = 10" ROUND TRIM FOR FML-R10 SERIES, BRUSHED NICKEL FINISH

FML-R10-TRM-BR = 10" ROUND TRIM FOR FML-R10 SERIES, BRONZE FINISH

FML-ULK-MCT = UPLIGHT MODULE FOR 18in AND LARGER FML SERIES, 15W, 30K/40K/50K
14" DIAMETER, 900 LUMENS

FML-RK-712 = 7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE

Example:

- FML-R10-MCT (FOR FML R10 MCT FIXTURE 120-277V)
- FML-R10-MCT
FML-R10-TRM-BK (FOR FML R10 MCT FIXTURE 120-277V)
(10" ROUND TRIM FOR FML-R10 SERIES, BLACK FINISH)
- FML-R10-MCT
FML-R10-TRM-BK
FML-RK-712 (FOR FML R10 MCT FIXTURE 120-277V)
(10" ROUND TRIM FOR FML-R10 SERIES, BLACK FINISH)
(7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE)

ACCESSORIES:

Optional Round Trims Fit Over the Fixture



FML-R10-TRM-BK
BLACK FINISH



FML-R10-TRM-BN
BRUSHED NICKEL FINISH



FML-R10-TRM-BR
BRONZE FINISH



FML-RK-712
7in/12in ROD KIT FOR FML SEMI-FLUSH INSTALLATIONS
BOTH LENGTHS PROVIDED IN THE KIT TO CHOOSE



FML-ULK-MCT
UPLIGHT MODULE FOR 18in AND LARGER FML SERIES
14" DIAMETER, 900 LUMENS

