


ICF SERIES Residential Lighting

ICF4SJBP
AIRTIGHT FIRE-RATED JUNCTION BOX

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

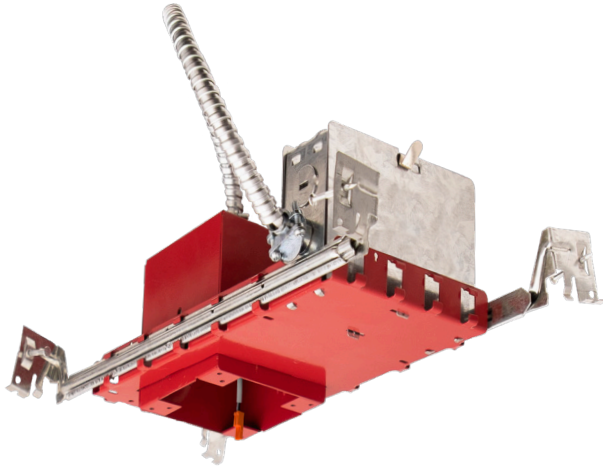


Customer Name: _____

Project Name: _____

Note: _____

Type: _____

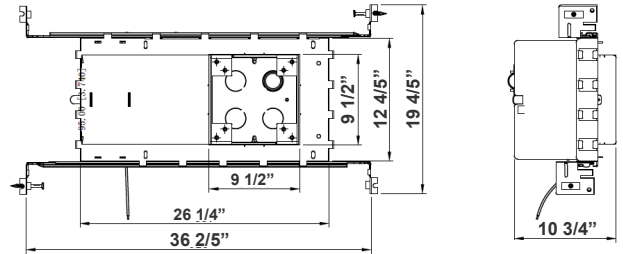

4" Fire-Rated Junction Box Housing For LED Surface
Mount Down Lights & J-Box Recessed Lights

36 2/5"(H) x 36 2/5"(W) x 10 3/4"(D)

Features

- Type IC Rated for Direct Contact With Insulation; Complies With The Standard of UL for Luminaires (UL 1598)
- ETL Listed for 2-Hour Fire Resistance to Meet and Exceed Strict Fire UL 263 Safety Code
- Meets Title 24 Requirements
- Rated for Direct Contact With IC Insulation
- LED quick connector provided
- ETL ASTM E283/E283M-19 Air Tight certified
- Integrated Non-Combustible Insulation Acts As a Sound Barrier Minimizing Sound Transfer Between Floors
- Light Fixtures Sold Separately

Technical Specifications

Mechanical:

- Die formed #16 gauge galvanized steel construction, Up to 120 minutes fire-rated L500 (floor-ceiling) & P500 (roof-ceiling) design.
- ETL Certificates ASTM E283 certified Air Tight
- UL 263 certificated up to 2 hour fire-rated
- Maximum Load: 50.70 Lbs.
- Suitable for Damp Locations

Junction Box:

- Pre-wired junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 14/2 NM cable and ground wire.
- Maximum of 8 #12 AWG conductors (4 in & 4 out)
- #21 gauge die-formed galvanized steel mounting frame

Housing:

- 3-1/2" deep 4" square housing fully assembled to plaster frame for ease of installation.

Hanger Bars:

- Pre-Installed #21 gauge adjustable hanger bars with True Nail easy installation in regular lumber, engineered lumber, and Laminated Beams. Integral T-Bar slots for easy installation in T-Bars. Adjustable length (14"-24") and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while easily aligning the housings with the joists

Applications:

- The junction box housing must be installed per the International Building Code Section 714 guidelines to maintain up to 2 hour ceiling fire rating. Precise ceiling cutout required. For use in from 1/2" to 1-1/4" ceiling thickness.
- Compatible with surface mount fixtures
- See installation sheet for detailed information

Other Models:


- ICF4SJBB




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




Other Views:

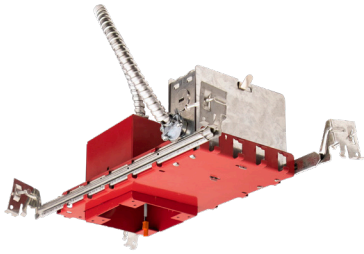

Side View

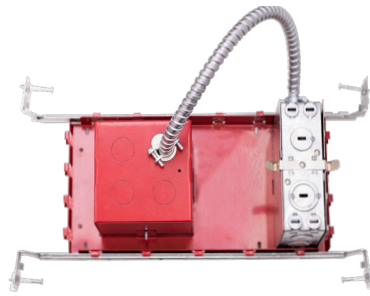

Top View

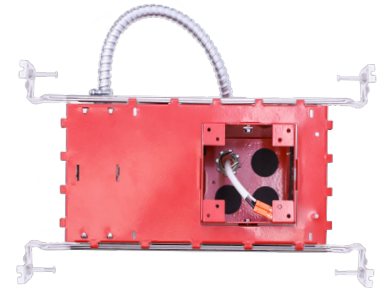


Bottom View

**Westgate Compatible Surface Mount Fixtures:
DLS-MCT SERIES**



DLS8-MCT

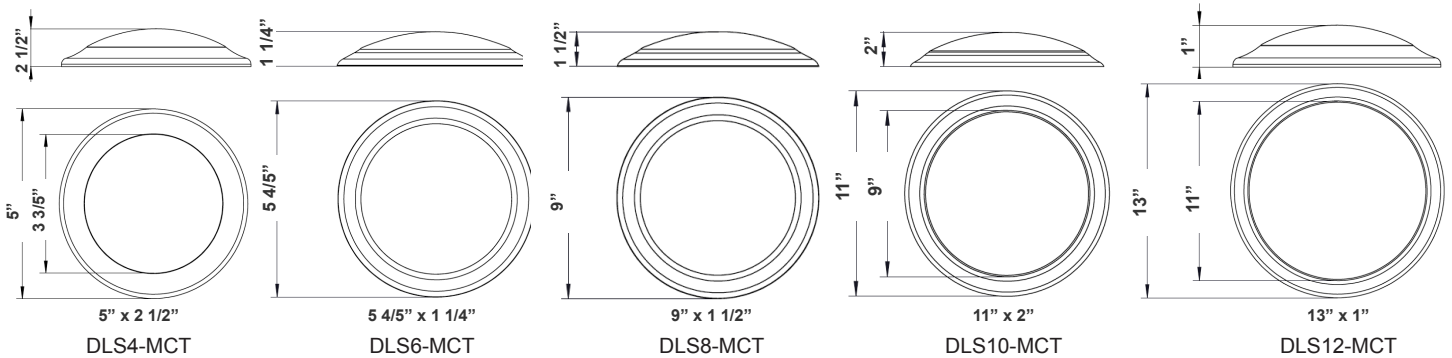


MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
DLS4-MCT	9W	120V	540LM	3000K/4000K/5000K
DLS6-MCT	15W	120V	900LM	3000K/4000K/5000K
DLS8-MCT	20W	120V	1200LM	3000K/4000K/5000K
DLS10-MCT	25W	120V	1500LM	3000K/4000K/5000K
DLS12-MCT	30W	120V	1800LM	3000K/4000K/5000K



Westgate Compatible Surface Mount Fixtures: DLSE SERIES



DLSE6-MCT

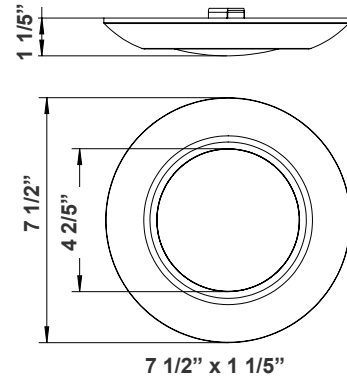


7 1/2" x 1 1/5"

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
DLSE4-MCT	9W	120V	540LM	3000K/4000K/5000K
DLSE6-MCT	15W	120V	1000LM	3000K/4000K/5000K

DLS-MCT-PIR SERIES



DLS8-MCT-PIR

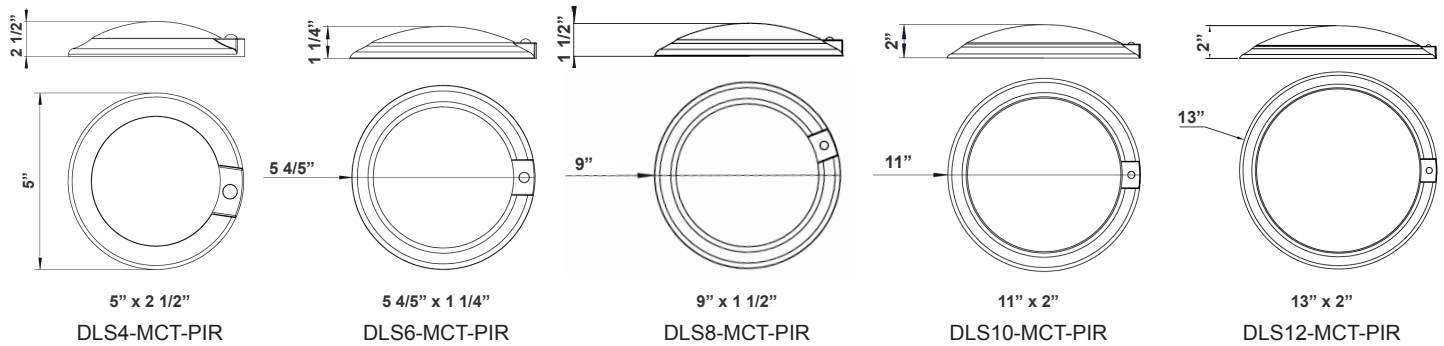

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
DLS4-MCT-PIR	9W	120V	540LM	3000K/4000K/5000K
DLS6-MCT-PIR	15W	120V	900LM	3000K/4000K/5000K
DLS8-MCT-PIR	20W	120V	1200LM	3000K/4000K/5000K
DLS10-MCT-PIR	25W	120V	1500LM	3000K/4000K/5000K
DLS12-MCT-PIR	30W	120V	1800LM	3000K/4000K/5000K




Westgate Compatible Surface Mount Fixtures:


DLS SERIES



DLS12-MCT-277

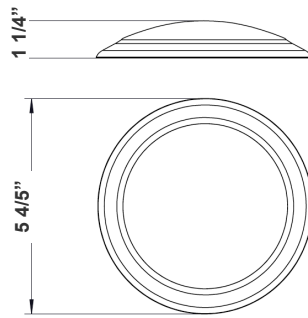

5 4/5" x 1 1/4"
DLS6-MCT-277V

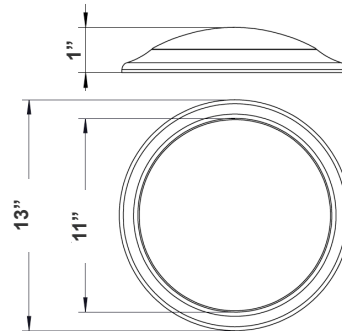


13" x 1"
DLS12-MCT-277V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
DLS6-MCT-277V	15W	277V	900LM	3000K/4000K/5000K
DLS12-MCT-277V	30W	277V	1800LM	3000K/4000K/5000K


FML-MCT SERIES




FML-R6-MCT




6" x 1"
FML-R6-MCT




8" x 1"
FML-R8-MCT




10" x 1"
FML-R10-MCT



14" x 1"
FML-R14-MCT



18" x 1"
FML-R18-MCT



22" x 1"
FML-R22-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.
FML-R6-MCT	11W	120V	660LM	3000K/4000K/5000K
FML-R8-MCT	14W	120V	840LM	3000K/4000K/5000K
FML-R10-MCT	17W	120V	1020LM	3000K/4000K/5000K
FML-R14-MCT	26W	120V	1560LM	3000K/4000K/5000K
FML-R18-MCT	30W	120V	2100LM	3000K/4000K/5000K
FML-R22-MCTt	45W	120V	2700LM	3000K/4000K/5000K



Other Westgate Compatible Fixtures:
(more info at www.westgatemfg.com)



FDL-MCT5 SERIES



FMD-MCT5 SERIES



FSL-MCT5 SERIES




FCS SERIES



FCR SERIES

Other Model:


ICF4SJBB

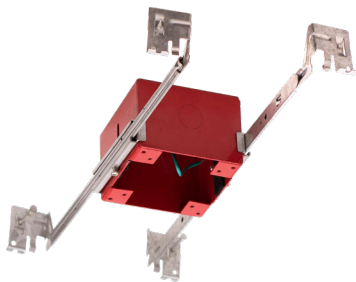

Side View



Top View

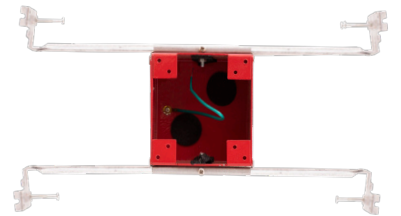

Bottom View

