

JOB NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_



**DIMENSIONS:**

48"(L) x 4-7/8"(W) x 3-1/4"(H)

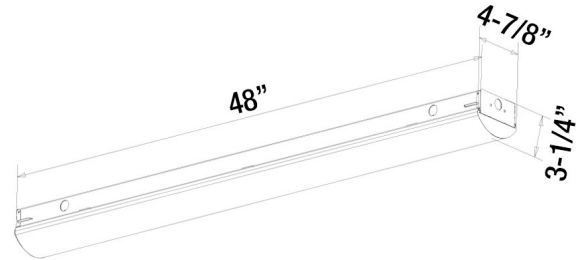

- LSL-4FT-40W-50K-D**
- LSL-4FT-40W-40K-D**
- LSL-4FT-40W-35K-D**
- LSL-4FT-40W-MCT-D**

**LED STRIP LIGHT**

Ideal for a variety of industrial, commercial and residential applications. Surface mount, wall mount or suspension mounting available.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120-277VAC 50/60Hz
- Wattage: 40W
- Power factor: >0.9
- Efficacy: 110LM/W

**HOUSING SPECIFICATIONS:**

- Evenly illuminated Frosted White polycarbonate lens
- Operating temperature: -22°F~104°F
- Lifespan: 50000 Hrs.
- IP rating: suitable for damp Locations

**CERTIFICATIONS:** ETL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
LSL-4FT-40W-50K-D	40W	120~277V AC	4200LM	5000K
LSL-4FT-40W-40K-D	40W	120~277V AC	4200LM	4000K
LSL-4FT-40W-35K-D	40W	120~277V AC	4200LM	3500K
LSL-4FT-40W-MCT-D	40W	120~277V AC	4200LM	MCT

**LIGHTING SPECIFICATIONS:**

- Dimming: 0~10 Dimmable
- Total lumens: 4200LM
- Color temperature: 3500K, 4000K and 5000K
- Color rendering index: >82

**WARRANTY:** 5 years

