

WMX SERIES


WMX-MD-20-80W-30K
WMX-MD-20-80W-40K
WMX-MD-20-80W-50K

LED OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

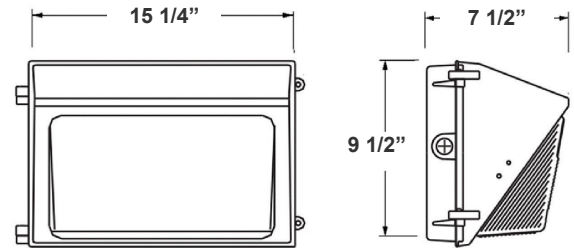

15 1/4"(W) x 9 1/2"(H) x 7 1/2"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Connect One End or Both Ends (Dual Function)
- Multi-Power Switch is inside the Fixture
- 7-year warranty
- Prismatic Borosilicate Glass Lens

Technical Specifications

Electrical:

- Input Wattage: 20/40/60/80W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 1.0 A
- Power factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top. 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Chip: Philips Lumileds LEDs
- Multi-Power Switch is inside the Fixture
- Total Lumens: 11200LM Max.
- Color Temperature: 3000K/4000K/5000K
- CRI: >70

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:



- 30W | 4200LM | WMX-SM-15-30W-30K
- 30W | 4200LM | WMX-SM-15-30W-40K
- 30W | 4200LM | WMX-SM-15-30W-50K
- 50W | 6800LM | WMX-MD-20-50W-30K
- 50W | 6800LM | WMX-MD-20-50W-40K
- 50W | 6800LM | WMX-MD-20-50W-50K
- 120W | 16500LM | WMX-LG-50-120W-30K
- 120W | 16500LM | WMX-LG-50-120W-40K
- 120W | 16500LM | WMX-LG-50-120W-50K




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: WMX-MD-20-80W



BUG Rating: B3-U4-G4

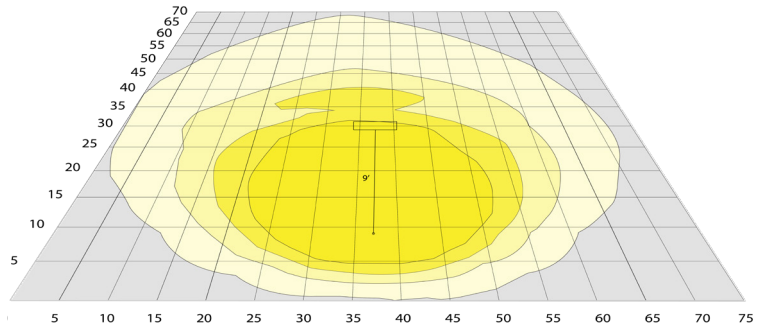

Area 70'x 75' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: WMX-MD-20-80W

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|-------------------|---------|----------|--------|-------------------------|------------|-----|
| WMX-MD-20-80W-30K | 20W | 120-277V | 2600LM | 3000K 4000K 5000K | B3-U4-G4 | 130 |
| | | | 2700LM | | | |
| | | | 2800LM | | | |
| WMX-MD-20-80W-40K | 40W | | 5400LM | | | |
| | | | 5600LM | | | |
| | | | 5800LM | | | |
| WMX-MD-20-80W-50K | 60W | | 8000LM | | | |
| | | | 8300LM | | | |
| | | | 8600LM | | | |
| WMX-MD-20-80W-50K | 80W | 10400LM | | | | |
| | | 10800LM | | | | |
| | | 11200LM | | | | |



Sample Ordering

| Model | Size | Min. Watt | Max. Watt | Color Temp. |
|-------|------|-----------|-----------|---|
| WMX | MD | 20 | 80W | <input type="text"/> 30K = 3000K 40K = 4000K 50K = 5000K |

Accessories:

Blank = No Option For Accessories
 WML-SH2= SHIELD FOR WMXPRO 60W

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-OD3INT= INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W & UP)
 OPT-PC-B= BUTTON
 OPT-CLR-85= COLOR PAINT
 WEC-8RC= REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

ACCESSORY:



WML-SH2

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD3INT



OPT-PC-B



WEC-8RC



OPT-SEN-3MRLV-5

Example:

1. WMX-MD-20-80W-50K

(FOR 80W MAX 50K FIXTURE 120-277V)

2. WMX-MD-20-80W-50K
 OPT-EM-OD3INT

(FOR 80W MAX 50K FIXTURE 120-277V)
 (INTERNAL EMERGENCY BACKUP BATTERY)

Dimensions:



WML-SH2
 SHIELD FOR WMXPRO 120W

