

WMXPRO SERIES LED OUTDOOR LIGHTING

WMXPRO-SM-15-30W-MCTP

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

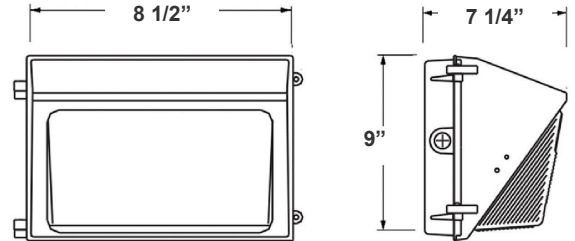

8 1/2"(W) x 9"(H) x 7 1/4"(D)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Connect One End or Both Ends (Dual Function)
- Multi Power & CCT (Switches are inside fixture)
- 7-year warranty
- Prismatic Borosilicate Glass Lens

Technical Specifications

Electrical:

- Input Wattage: 15/20/25/30W
- Input Voltage: 120-277V AC 50/60Hz
- Input current: 0.35A
- Power factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- ADC12 Aluminum Heat Sink, Outdoor Powder Coating
- Lens: Prismatic Borosilicate Glass Lens
- Same Footprint as Traditional HID Wall Packs
- Four 1/2" Hubs: 1 top, 1 on Each Side, 1 Rear
- Mounting: Wall Mounting
- Operating Temperature: -40°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0-10V Dimming
- Chip: Philips Lumileds LEDs
- Multi Power & CCT (Switches are inside fixture)
- Total Lumens: 4200LM Max.
- Color Temperature: 3000K/4000K/5000K/5700K
- CRI: >70

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID wall packs
- Great for use with photocell

Other Models:

• 60W | 8100LM | WMXPRO-MD-20-60W-MCTP • 80W | 11200LM | WMXPRO-MD-20-80W-MCTP • 120W | 16500LM | WMXPRO-LG-50-120W-MCTP






Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



WG-ZC-2D-ZZ

Photometrics: WMXPRO-SM-15-30W-MCTP

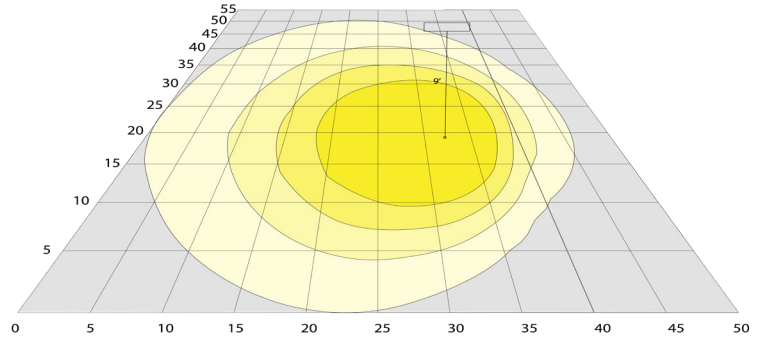

BUG Rating: B1-U3-G2

Area 55'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WMXPRO-SM-15-30W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMXPRO-SM-15-30W-MCTP	15W	120-277V	1850LM	3000K 4000K 5000K 5700K	B1-U3-G2	130
			1925LM			
			2000LM			
			2000LM			
			2500LM			
	20W		2600LM			
			2700LM			
			2700LM			
			3250LM			
			3375LM			
	25W		3500LM			
			3500LM			
			3500LM			
			3900LM			
			4050LM			
30W	4200LM					
	4200LM					
	4200LM					
	4200LM					
	4200LM					



Sample Ordering

Model	Size	Min. Watt	Max. Watt	Watt/Color Temp.
WMXPRO	SM	15	30W	MCTP

Accessories:

Blank = No Option For Accessories

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-OD1EXT= EXTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W & UP)
 OPT-PC-B= BUTTON
 OPT-CLR-85= COLOR PAINT
 WEC-8RC= REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

Example:

1. WMXPRO-SM-15-30W-MCTP
2. WMXPRO-SM-15-30W-MCTP
OPT-EM-OD1EXT

(FOR 30W MAX MCTP FIXTURE 120-277V)

(FOR 30W MAX MCTP FIXTURE 120-277V)
(EXTERNAL EMERGENCY BACKUP BATTERY)

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1EXT



OPT-PC-B



WEC-8RC



OPT-SEN-3MRLV-5

