

ONE-LIGHT FLUSH MOUNT

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350023-009-30

Description:

A tapered, square, linen finish glass diffuser is paired with an energy-efficient, high-performance LED source in this contemporary ceiling fixture.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched White Linen glass diffuser
- LED Module is replaceable (part # 93074038)
- Features a tapered square, linen finish glass diffuser
- Diffuser is paired with an energy-efficient, high-performance LED source.
- 1425 lumens 83.4 lumens/watt (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1452/83 (LM-82)
Lumens/LPW (Delivered)	1078/62.3 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30° C
Warranty	5 year warranty
Labels	CSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Diameter: 9-1/2"
Height: 4-3/8"

Glass
Width: 9-1/2"
Height: 3-7/8"

Photometrics:

P350023-009-30

ELECTRICAL DATA	P350023-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30° C
Dimming	Yes*

*See Dimming Notes for more information

P350023-009-30


LED Light Engine: 3000 K 90+
 System Wattage: 17
 Fixture delivered lumens: 1078
 Fixture Efficacy: 62.3
 Spacing Criteria: 1.31

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	274	
5	273	26
15	267	75
25	252	116
35	228	142
45	192	148
55	150	134
65	111	110
75	78	83
85	52	57
90	42	
95	34	38
105	24	26
115	21	21
125	20	18
135	18	14
145	15	10
155	12	6
165	7	2
175	4	0
180	2	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	218	21.2
0-40	360	35.0
0-60	642	62.5
0-90	893	86.8
90-120	85	8.3
90-130	103	10.1
90-150	127	12.4
90-180	135	13.2
0-180	1028	100.0

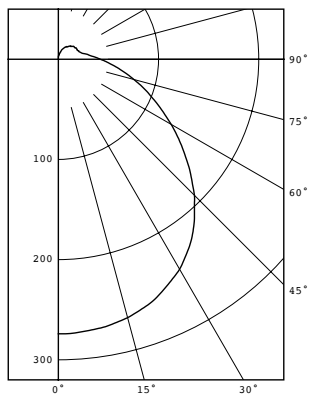

Test 17.00290 Test Date 01/26/17

P350023-009-30**Dimming Notes:**

P350023 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.