


DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

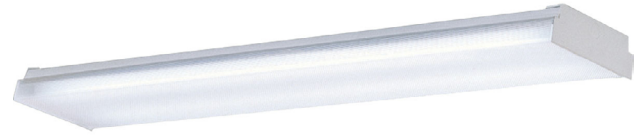

Linear fluorescent

P7196-30EB

Modular Fluorescent

Wrap around with clear extruded acrylic diffuser. Squared white end caps. Surface mounted white chassis regressed within trim and electronic 120V HPF ballast.

- Clear extruded prismatic acrylic wrap around lens.
- Baked enamel White finish
- Steel construction
- Lift and shift removal of lens for relamping and servicing
- Regressed reveal gives floating effect
- Squared white metal end caps
- Sockets metal backed
- Easily removable cover for ballast access
- Can be mounted individually, in a continuous run or ceiling mounted
- Chassis covers a standard 4" hexagonal recessed outlet box
- Bi-pin twist in base lamp holders
- 120V NPF electronic ballast
- Meets California Title 24

Width: 14-5/8"
Length: 47-7/8"
Height: 3"

Glass
Width: 14-3/8"
Length: 47-7/8"
Height: 1-13/16"

Category: Modular Fluorescent

Finish: White (baked enamel)

Construction: Steel Construction

Glass/Shade: Clear extruded prismatic acrylic wrap around lens

| MOUNTING | ELECTRICAL | LAMPING | ADDITIONAL INFORMATION |
|---|---|--|---|
| <p>Ceiling mounted</p> <p>Mounting housing for outlet box included</p> <p>Chassis covers a standard 4" octagonal recessed outlet box</p> <p>47.875" W., 2.84375" ht., 14.625" depth</p> | <p>Pre-wired</p> <p>120V HPF electronic 120 V</p> | <p>Quantity:</p> <p>Four 32w max. F32T8</p> <p>Bi-pin twist-in base ceramic lamp holders</p> | <p>UL-CUL Damp location listed</p> <p>1 year warranty</p> <p>Meets California Title 24 high efficacy requirements</p> |